

ID Material: 18
Rble: R. Antich
Revision: 5
Date: 17/03/2017

SA80/20

SA80/20 is black rigid friction material based on graphite with a medium low friction coefficient, offers low wear and silent operation. The material consists phenolic resins as a bonding system, short fibers, friction lubricants and fillers. SA80/20 is fully cured and suitable for bonding and riveting.

Material data

Friction properties (according graphics)

Dynamic Friction Coefficient (79N, 7m/s):	0.35±0.05	μ
Wear Rate (79N, 7m/s):	34±10	mm ³ /Kwh
T° Fading (100N, 11.5m/s):	280±10	°C

Physical properties

Hardness (DIN53505):	75±5	Shore-D
Specific Gravity (ASTM D792-91):	1.8±0.05	gr/cm3
Ignition Loss (ASTM D-2524):	36±2	%
Acetone Extraction ISO2859-1:	1.85±0.2	%

Mechanical properties

Tensile Strength (ASTM D638-10):	16±5	N/mm ²
Compressive Strength (UNE 53205):	83±5	N/mm ²

Recommended Working Values

T° Max. Continuous Operation:	250	°C
T° Max. Intermittent Operation:	350	°C

Material type : Rigid material

Appearance / Formats



Applications

Callipers for industrial applications - Continuous brakes - Friction washers - Torque limiter -


Price Level : € € €

Reach (EC)1907/2006 - RoHS 2011/65/EU : Compliance

Others

Recommended Mating Surface:	Perlitic cast iron, hardness HB150-200
Recommended Adhesives:	Thermosetting adhesive
Oil Resistant:	Yes

Friction coefficient (μ) vs Temperature (°C) @80psi 7m/s

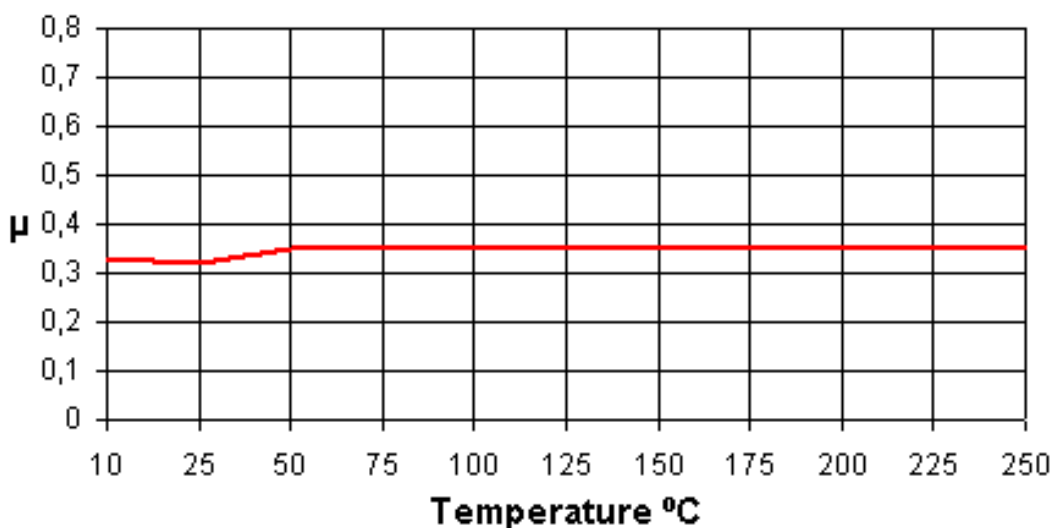

Rubbing speed, temperature and pressure are related. Changing any values will change other. The values shown represent typical conditions, but are not ultimate limits of the material.